

DZQ 35/4 B



Short description

Axial wall fan with square wall plate, DN 350, three-phase AC

Application examples

Production facility, Commercial premises, Garage, Building container, Storage facility

Article number 0083.0123

Technical data

Model	Square wall plate
Air flow volume	2.840 m ³ /h
Air volume _{nom}	1.950 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	70 Pa (in opt. efficiency)
Rotating speed n _{nom}	1.380 1/min (in opt. efficiency)
Rotating speed	1.410 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	133 W (in opt. efficiency)
I _{nom}	0,35 A (in opt. efficiency)
I _{max}	0,4 A
Degree of protection	IP 55
Insulation class	B
Pole-changeable	–
Mains cable	7 x 1,5 mm ²
Installation site	Wall / Ceiling
Type of installation	Surface-mounted
Installation position	horizontal / vertical
Material	Sheet steel, galvanised
Colour	Silver
Weight	9,12 kg
Weight including packaging	11,02 kg
Nominal size	350 mm
Width	525 mm
Height	525 mm

DZQ 35/4 B

Depth	244 mm
Width with packaging	540 mm
Height with packaging	540 mm
Depth with packaging	335 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Airstream temperature at I_{Max}	-20 °C up to 60 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799831235

Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency η	28,5 %
Measurement category	A
Efficiency category	static
Efficiency level N	40,4
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0123
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	0,133 kW / 1.950 m ³ /h / 70 Pa
η_{BEP}	1.380 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
Sound power level $_{L_{WA7}}$	69 dB(A)

Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S1}$ (dB(A))	-	-	-	-	-	-	-	-	53
$L_{WA7, S2}$ (dB(A))	-	-	-	-	-	-	-	-	61
$L_{WA7, S3}$ (dB(A))	-	-	-	-	-	-	-	-	65
$L_{WA7, S4}$ (dB(A))	-	-	-	-	-	-	-	-	67
$L_{WA7, S5}$ (dB(A))	30	43	56	61	63	65	61	50	69

DZQ 35/4 B

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA8, S1} (dB(A))	51	57	61	64	70	71	72	70	60
L_{WA8, S2} (dB(A))	-	-	-	-	-	-	-	-	74
L_{WA8, S3} (dB(A))	-	-	-	-	-	-	-	-	76
L_{WA8, S4} (dB(A))	-	-	-	-	-	-	-	-	77
L_{WA8, S5} (dB(A))	-	-	-	-	-	-	-	-	77


L_{WA7}= housing and free inlet sound power level in dB.
 L_{WA8}= housing and free outlet sound power level in dB.

Characteristic curve

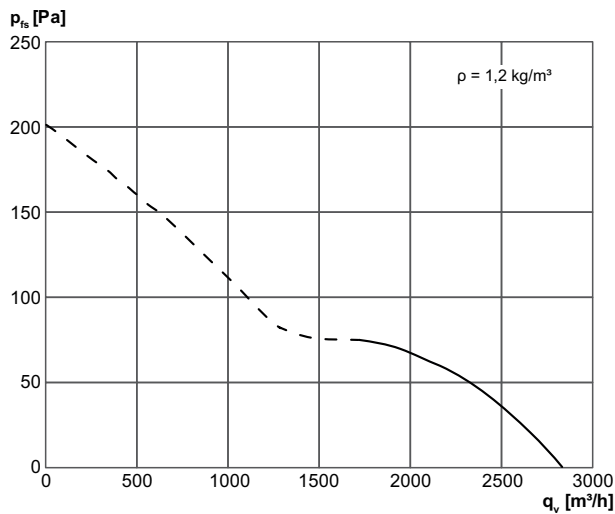

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

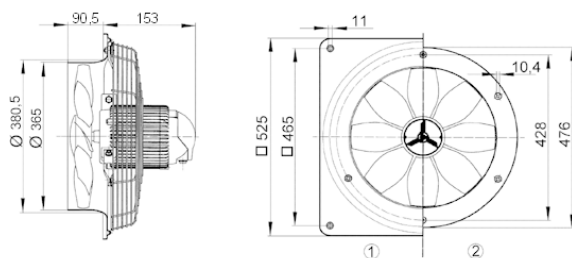

DZQ 35/4 B

