

DZS 30/6 B Ex t



Short description

Axial wall-mounted fan with steel wall ring, DN300, three-phase AC, explosion-proof, medium: dust

Article number 0094.0205

Technical data

Model	Steel wall ring
Air flow volume	1.100 m ³ /h
Rotating speed	985 1/min
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	25 W
cosφ	0,27
I _{nom}	0,12 A
I _{max} at U _{Nominal}	0,13 A
Degree of protection	IP 64
Insulation class	F
Type of installation	Surface-mounted
Material	Sheet steel, galvanised
Colour	galvanised
Weight	7,9 kg
Weight including packaging	8,3 kg
Nominal size	300 mm
Width	465 mm
Height	465 mm
Depth	278 mm
Width with packaging	480 mm
Height with packaging	480 mm
Depth with packaging	320 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIB T135°C Db IP64 X / Ex h IIIB T135°C Db X
Ta ambient temperature	-20 °C ≤ Ta ≤ +40 °C

DZS 30/6 B Ex t


I _A /I _N	3,4
Time t _A	1390 sek
Operating mode	S1
PTC DIN 44082	M 80
EC type examination certificate	TÜV-A 19 ATEX0102 X, IECEx EPS 19.0018X
Temperature class	T135°C
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799942054

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	-	-	-	-	-	-	-	-	60

L_{WA7}= housing and free inlet sound power level in dB.

Characteristic curve

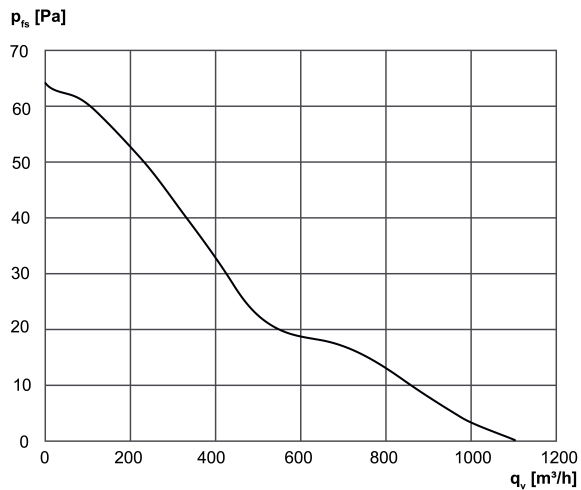

DZS 30/6 B Ex t

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

