

KBR Centrifugal Fans

Powerful and efficient exhaust fans for medium temperatures up to 120°C

- Up to 120°C medium temperature, continuous operation
- Acoustic and thermal insulation 50 mm
- Excellent for commercial kitchens and process exhaust systems
- Easy to service and maintain due to the swing-out inspection door

[Find more details in our online catalogue](#)



Reliability

The KBR box fans are designed for reliable, continuous use with medium temperatures up to 120°C.

The combination of reliable casing and motor construction ensure minimize the need for maintenance of the fans and allows long **continuous operation**.

Performance

High performance impeller together with **high efficient** motors are designed to ensure high-level performance to **minimize power consumption** and **maximize efficiency**.

Noise

The **casing** of **KBR** models have perfect **acoustic** and **thermal** insulation capacity.

Features

Construction

The KBR casing is manufactured from doubleskinned galvanised sheet steel and is insulated with 50 mm mineral wool. The fan is isolated from the casing via connectors and anti-vibration dampers are incorporated into the base frame. Standard is that the motor is outside the air stream. The KBR fans have a swing-out door for easy inspection and service.

Impeller

The KBR fans use **radial** impeller with **backward curved blades**. These are made out of galvanised steel, dynamically **balanced** and paired with corresponding **IEC motor** with efficiency **IE3 or EC motor**.

Motor

Depending on the type, KBR fans are equipped with **AC** or **EC** external rotor motors. Motors are suitable for **50Hz** and **60Hz**.

Motor protection

Depending on the type, **AC** motors have an **integrated** thermal protection with manual (electrical) reset, prewired integral **thermocontact TK** or **thermistor PTC** with leads to a **motor protection device**. Fans with **EC** motors have an **integrated** electronic **thermal protection** including **locked-rotor protection** and **soft-start**.

Control

EC motors with **built-in potentiometer** to adjust working point can be also controlled by external **signal 0-10V**. **EC motors, depending on the type** are also equipped with **ModBus** communication **or alarm signal**. **AC motors** can be controlled by **5-step, stepless** speed regulator, **D/Y** switch or **frequency converter**.

Installation

The fans can be used **indoor** or with **specific accessories** also **outdoor**. Due to the mounted **base frame the fan** can stand **on floor**. For **preventing vibration** to the duct is recommended to use **flexible connection**.

Technical parameters

Nominal data

Voltage (nominal)	400	V
Frequency	50	Hz
Phases	3~	
Motor circuit connection	Y	
Input power	783	W
Input power kW	0.783	kW
Input current	1.2	A
Impeller speed	2,796	rpm
Air flow	max 2,952	m ³ /h
Temperature of transported air	max 120	°C

Sound data

Sound pressure level at 10m (free field)	36	dB(A)
Sound pressure level at 4m (free field)	44	dB(A)

Protection/Classification

Enclosure class, motor	IP55
Insulation class	F

Dimensions and weights


Duct dimension; Circular, inlet	280	mm
Duct dimension; Circular, outlet	280	mm
Weight	49	kg

Others

Duct connection type	Circular
Motor type	AC

Performance

Performance curve

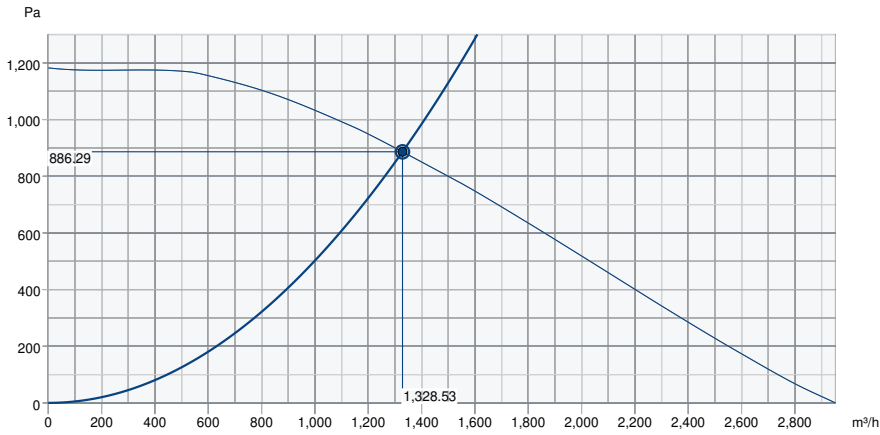

Hydraulic data

Required air flow	1,328 m³/h
Required static pressure	886 Pa
Working air flow	1,329 m³/h
Working static pressure	886 Pa
Air density	1.204 kg/m³
Power	695.0 W
Fan control - RPM	2,806 rpm
Current	1.05 A
SFP	1.883 kW/m³/s
Control voltage	400.0 V
Supply voltage	400 V

Acoustic

Mid-frequency band, Hz

280D4	Hz	Tot	125	250	500	1k	2k	4k	8k
LwA Inlet	dB(A)	74	68	66	62	59	57	53	49
LwA Outlet	dB(A)	76	70	68	64	61	59	55	51
LwA Surrounding	dB(A)	56	50	48	44	41	39	35	31

Measuring point: 1512 m³/h, 800 Pa

Mid-frequency band, Hz


280D2	Hz	Tot	125	250	500	1k	2k	4k	8k
LwA Inlet	dB(A)	86	80	78	74	71	69	65	61
LwA Outlet	dB(A)	88	82	80	76	73	71	67	61
LwA Surrounding	dB(A)	67	61	59	55	52	50	46	42

Measurement point: 1512 m³/h, 800 Pa

4-pol

2-pol

Dimension

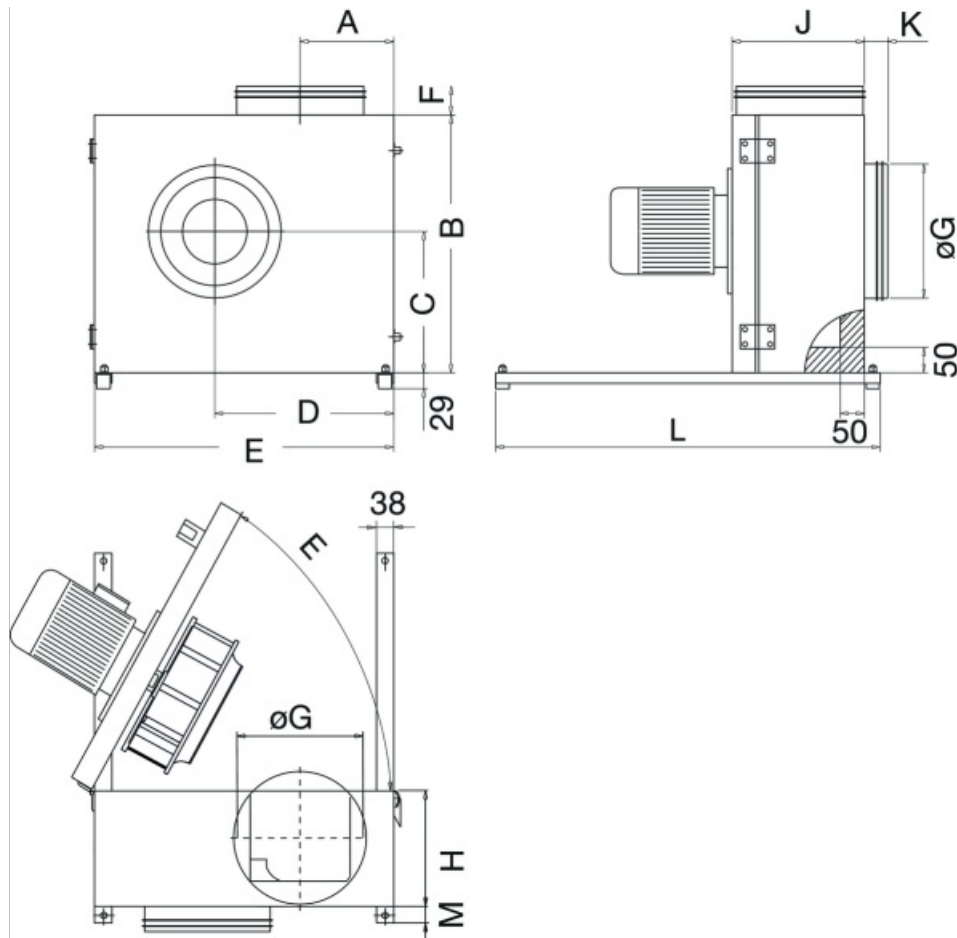


KBR	A	B	C	D	E	F	$\varnothing G$	H	J	K	L	M
280	171,5	537	295	360	625	125	280	234	291	70	620	55

Wiring

Y 400V

low speed

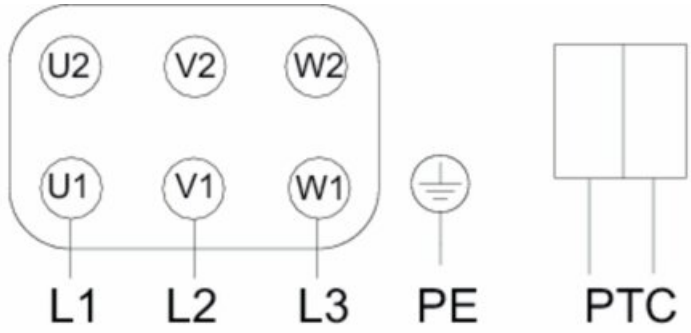


max. 2,5V

Dahlander

YY 400V

high speed

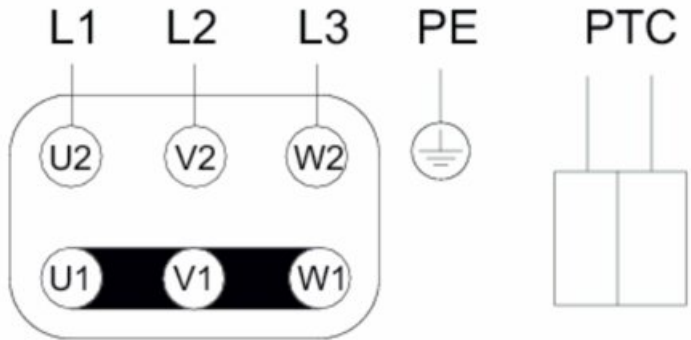

cir-dia_kbr d2_160511_en_001

Accessories

- ASF 280/KB Flex. connection (2717)
- Frequency converter FRQ5-4A (36229)
- Frequency converter FRQS-4A (36231)
- U-EK230E Motor protection (30199)
- ALS-KBR drain plug (2727)
- REV-9POL/12-7,5kW B/G (281743)
- Frequency converter FRQ-4A (36227)
- Frequency converter FRQ5S-4A (36233)
- REV-9POL/12-7,5kW R/Y (33981)
- WSD KBR-2 Weather roof f.motor (2729)
- WBK 225/280 Wall bracket (2720)

Documents

- Installation, Operation and Maintenance instruction_005
- EC Declaration of Conformity KBT, KBR, MUB-K, MUB-T, MUB-T-S, DVV
- EU DECLARATION OF CONFORMITY_THERMOFANS_EN_004.PDF