

MUB-EX Insulated duct fans

Hard-wearing explosion-proof fans for critical applications

- Combine maximum safety with maximum flexibility
- Certified according to ATEX directive 2014/34/EU
- Discharge direction adjustable on site
- Low sound level

[Find more details in our online catalogue](#)



Safety first

MUB EX fans are designed for challenging environments where explosive atmospheres can occur. Which is why they are tested according to ATEX directive 2014/34/EU – to ensure they'll perform as intended after installation.

Sturdy and strong

MUB EX fans come with an aluminium frame and impellers, double skin panels manufactured from galvanised steel, shock-resistant corners, and panel rivets. Making them highly resistant to environmental stressors in their specialised applications.

Flexibility

Like all MUB fans, MUB EX fans come with removable panels so the outlet side can be chosen on-site prior to installation. Giving you further flexibility if your plans or requirements change in between ordering and final installation.

Performance

MUB-EX can be used for temperature classes T1, T2 and T3. Exhaust of explosive gases in Zone 1 and Zone 2, and groups IIA and IIB plus hydrogen H² is possible.

Features

Construction

The casing consists of a corrosion-resistant aluminium frame with fibreglass reinforced plastic corners of PA6; highly shock-resistant. Panels made of double skin galvanized sheet steel with 30 mm acoustic and thermal rockwool insulation.

The inlet nozzle is made of copper, which prevents sparking even in exceptional cases.

The MUB-EX fans are designed for straight airflow as standard. Due to its flexible components, the air direction can be adjusted on site.

Impeller

The MUB-EX fans use radial impeller with backward curved blades. These are made out of aluminium, dynamically balanced and paired with corresponding external rotor motors.

Motor

Voltage controllable, explosion proof, 3-phase external rotor motor. Separate "Ex-e" connection box available as an accessory.

Motor protection

Integrated PTC thermistors, to be connected to a motor protection device.

Control

Speed controllable by a 5-step transformer

Installation

The MUB-EX fans can be installed in any position.

Technical parameters

Nominal data

Voltage (nominal)	400	V
Frequency	50	Hz
Phases	3~	
Input power	685	W
Input power kW	0.685	kW
Input current	1.21	A
Impeller speed	879	rpm
Air flow	max 7,508	m³/h
Temperature of transported air	max 40	°C
Max temperature of transported air, when speed controlled	40	°C

Protection/Classification

Enclosure class, motor	IP44
Insulation class	F
Explosion proof marking	II 2G Ex h IIB+H2 T3 Gb
Certificate	TPS 20 ATEX 085751 0008 X

Ambient and duct temperature

Ambient and duct temperature	-20 to 40	°C
------------------------------	-----------	----

Dimensions and weights


Weight	75.2	kg
--------	------	----

Others

Motor type	AC
------------	----

Performance

Performance curve

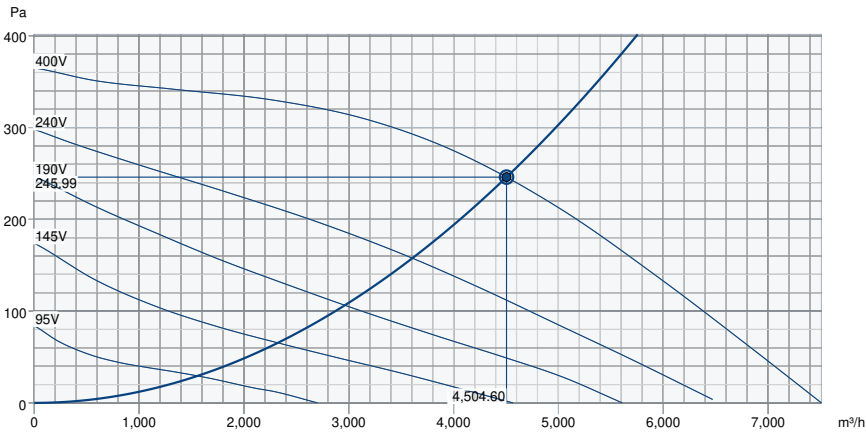


Hydraulic data

Required air flow	4,505 m³/h
Required static pressure	246 Pa
Working air flow	4,505 m³/h
Working static pressure	246 Pa
Air density	1.204 kg/m³
Power	687.5 W
Fan control - RPM	879 rpm
Current	1.23 A
SFP	0.549 kW/m³/s
Control voltage	400.0 V
Supply voltage	400 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	53	58	62	69	67	62	58	48	72
Outlet	dB(A)	55	59	63	70	68	63	59	50	74
Surrounding	dB(A)	52	51	58	50	46	46	45	34	60
Sound pressure level at 3m (20m² Sabine)	dB(A)	-	-	-	-	-	-	-	-	53
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	39


Dimension

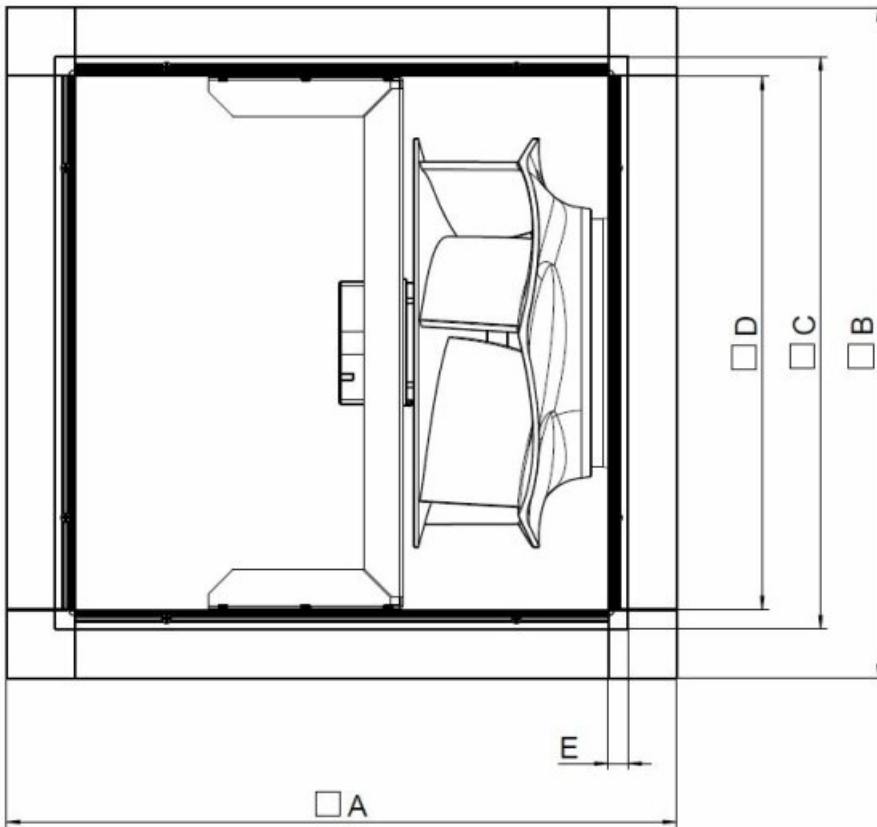


MUB-EX	A	B	C	D	E
062 560/630	820	820	720	678	21

Wiring

230V3~ (D)

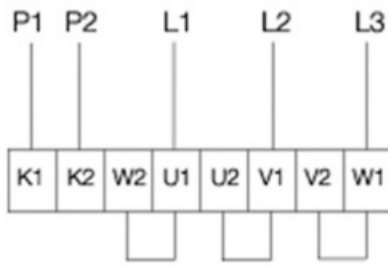

400V3~ (Y)

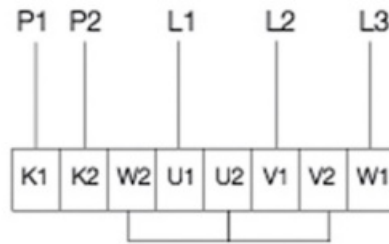

U1	brown
V1	blue
W1	black
U2	red
V2	grey
W2	orange
K1	white (PTC)
K2	white (PTC)

Accessories

- R-DK4 KT Transformer (302568) (6051)
- RTRD 2 Speed Cont. Systemair (5941)
- SD-MUB Vibration pad set (37324)
- WSD 062 (860x860x70) complete (31482)
- REV-3POL/ATEX-11kW R/Y (36414)
- CCM inlet MUB062 d630 (311783)
- CCM outlet MUB062 d630 (311681)
- CCMI outlet 062 d560 KIT 30mm (239095)
- Ex e-Terminal box 1,5/6mm² 32A (2704)
- REV-5POL/07-7,5kW R/Y (33980)
- RTRDU 2 Speed contr. Systemair (5945)
- U-EK230E Motor protection (30199)
- WSG 062 MUB complete (31486)
- CCM inlet MUB062 d560 (311782)
- CCM outlet MUB062 d560 (311684)
- FGV-EX 062/716-716 flex. conn. (239062)
- CCMI outlet 062 d630 KIT 30mm (239096)

Documents

- imo_fans_atex_en_008
- TPS_20_ATEX_085751_0008_X_EN_2.PDF
- EU_DECLARATION_OF_CONFORMITY_ALL_009_314830.PDF