

Technical Data Sheet

CODE 11321

M 120/5" A

Wall/window axial fans



Certifications



CE



CCC



EAC



G-Mark



UKCA




CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Ø Discharge hole (mm)	119
Inlet	Automatico	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	0,8
IP	X4	Max airflow (l/s)	48,6
Max absorbed current (A)	0,12	Max airflow (m ³ /h)	175
Max absorbed power (W)	20	Max pressure (mmH ₂ O)	4,5
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	44
Nominal diameter (mm)	120	RPM	2100
		Sound pressure Lp [dB (A)] at 3 m	39,5

DIMENSIONS

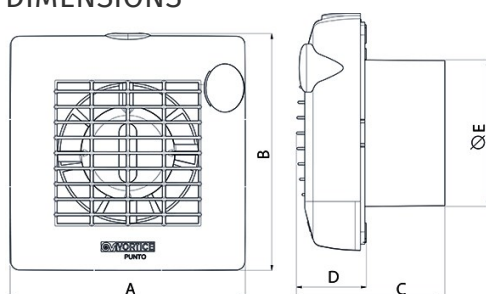

Size A (mm)	179
Size B (mm)	181
Size C (mm)	110
Size D (mm)	47
Size E (mm)	Ø 119

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 11321

M 120/5" A


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m³/h.
- Equipped with system by which the louvres of the grille are opened and closed automatically.

CURVES

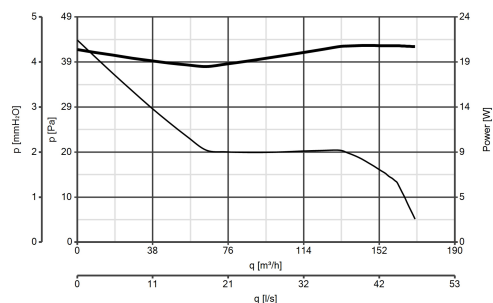

ACCESSORIES



F 120/5"

Code 22132



S 120/5

Code 22155



KIT SCB (TRASF.E.C.)

Code 22481

PER INFORMAZIONI /
FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com