

# Technical Data Sheet

CODE 11884

## M 150/6" A PIR LL

Wall/window axial fans



### Certifications

CE CE

EAC EAC

G-Mark G-Mark


UKCA UKCA

CB TEST CERTIFICATE

### TECHNICAL AND PERFORMANCE DATA

|   |      |                                   |         |
|---|------|-----------------------------------|---------|
| Frequency (Hz)  | 50   | Voltage (V)                       | 220-240 |
| Insulation class                                      | II°  | Weight (Kg)                       | 1,1     |
| IP  | X4   | Max airflow (l/s)                 | 93,1    |
| Max absorbed current (A)                              | 0,15 | Max airflow (m³/h)                | 335     |
| Max absorbed power (W)                                | 29   | Max pressure (mmH2O)              | 6       |
| Max ambient temperature for continuous operation (°C) | 50   | Max pressure (Pa)                 | 59      |
| Nominal diameter (mm)                                 | 160  | RPM                               | 2100    |
| Ø Discharge hole (mm)                                 | 156  | Sound pressure Lp [dB (A)] at 3 m | 46      |

### DIMENSIONS

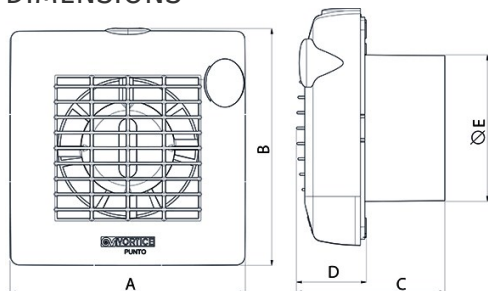

|             |     |
|-------------|-----|
| Size A (mm) | 214 |
| Size B (mm) | 215 |
| Size C (mm) | 117 |
| Size D (mm) | 47  |
| Size E (mm) | Ø   |
|             | 156 |

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND  
Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com

# Technical Data Sheet

CODE 11884

## M 150/6" A PIR LL

Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m3/h.
- Incorporates electronic presence detector with infrared sensor, and electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3'), after the room has been vacated.
- Equipped with system by which the louvres of the grille are opened and closed automatically.

### CURVES

□

### ACCESSORIES



#### F 150/6"

Code 22133



#### S 150/6

Code 22156

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)