

# Technical Data Sheet

CODE 11851

## M 150/6" P

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC



EAC



G-Mark




UKCA

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	1,1
IP	X4	Max airflow (l/s)	93,1
Max absorbed current (A)	0,15	Max airflow (m <sup>3</sup> /h)	335
Max absorbed power (W)	29	Max pressure (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	59
Ø Discharge hole (mm)	156	RPM	2100
		Sound pressure Lp [dB (A)] at 3 m	46

### DIMENSIONS

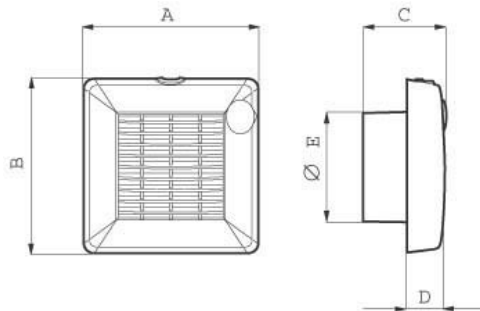

Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	Ø
	156

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

#### IRELAND

Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com

# Technical Data Sheet

CODE 11851

## M 150/6" P


Wall/window axial fans



### DESCRIPTION

- Version with built-in switch operated by pullcord mounted to edge of grille.
- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m<sup>3</sup>/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

### CURVES

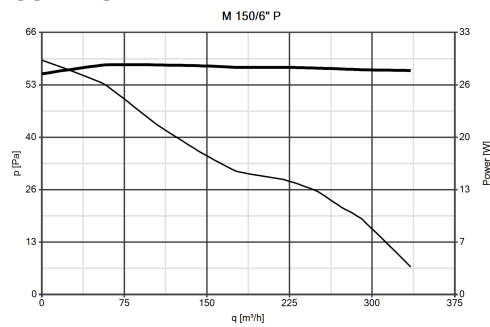

### ACCESSORIES



#### F 150/6"

Code 22133



#### S 150/6

Code 22156

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)