

Technical Data Sheet

CODE 11525

QE 100/60/35 LL

Centrifugal duct fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Max airflow at Max speed (m ³ /h)	100
Insulation class	II°	Max airflow at Mid speed (m ³ /h)	60
IP	45	Max airflow at Min speed (l/s)	16,7
Max absorbed current at Max speed (A)	0,17	Max pressure at Max speed (mmH2O)	36
Max absorbed current at Mid speed (A)	0,14	Max pressure at Max speed (Pa)	353
Max absorbed current at Min speed (A)	0,11	Max pressure at Mid speed (mmH2O)	35
Max absorbed power at Max speed (W)	26	Max pressure at Mid speed (Pa)	343
Max absorbed power at Mid speed (W)	16	Max RPM	1570
Max ambient temperature for continuous operation (°C)	50	Min RPM	855
Nominal diameter (mm)	80	Pressure at 1st speed (mmH2O)	10
Ø Discharge hole (mm)	70	Pressure at 1st speed (Pa)	98
Power absorbed at 1st speed (W)	9	RPM at Mid speed	1170
Voltage (V)	220-240	Sound power LWA at Mid speed [dB (A)]	43
Weight (Kg)	2,33	Sound power at Min speed LWA [dB(A)]	38
Airflow at 1st speed (l/s)	9,7	Sound power at Min speed LWA [dB(A)]	48
Airflow at 1st speed (m ³ /h)	35	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	20,5
Max airflow at Max speed (l/s)	27,8	Sound pressure at 3m at Max speed Lp [dB (A)]	30,5
		Sound pressure at 3m at Min speed Lp [dB (A)]	25,5

DIMENSIONS

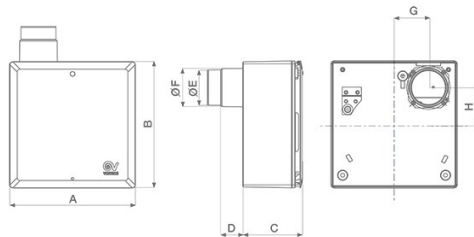

Size A (mm)	262
Size B (mm)	262
Size C (mm)	115,5
Size D (mm)	80
Size E (mm)	73
Size F (mm)	79
Size G (mm)	71,5
Size H (mm)	90

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11525

QE 100/60/35 LL

Centrifugal duct fans




DESCRIPTION

- Scroll and front panel made of self-extinguishing ABS, rated V0.
- Motor housing and filter frame made of ABS plastic.
- 3 speed AC motor, shaft on ball bearings, coupled to a forward curved centrifugal impeller, PBT made.
- Nominal airflows: 100 / 60 / 35 m³/h
- G2 filter, with a clogged filter mechanic alarm fully compliant with ErP reg. N° 1253/2014/UE, in force since 1st January 2018.
- The switching on/off of the product can be realized through a

dedicated external switch or the light control. Different level of performances, or rather the transition from Min to Max speed, can be realized through an external switch. During the installation, is also possible to set the continuous running mode at minimum speed (Continuous Ventilation of the room), moving to an higher speed selection (Boost mode) through the external switch.

CURVES

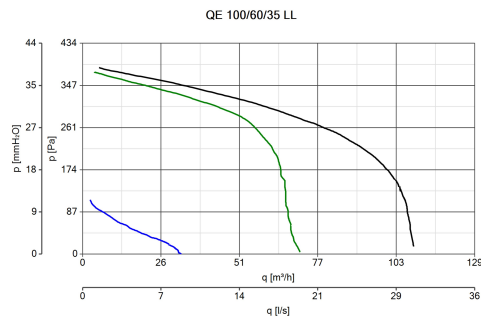

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com