

Technical Data Sheet

CODE 11312

M 120/5" T LL

Wall/window axial fans



Certifications

CE CE

EAC EAC

G-Mark G-Mark


UKCA UKCA

CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	0,8
IP	X4	Max airflow (l/s)	48,6
Max absorbed current (A)	0,12	Max airflow (m ³ /h)	175
Max absorbed power (W)	20	Max pressure (mmH ₂ O)	4,5
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	44
Nominal diameter (mm)	120	RPM	2100
Ø Discharge hole (mm)	119	Sound pressure Lp [dB (A)] at 3 m	39,5

DIMENSIONS

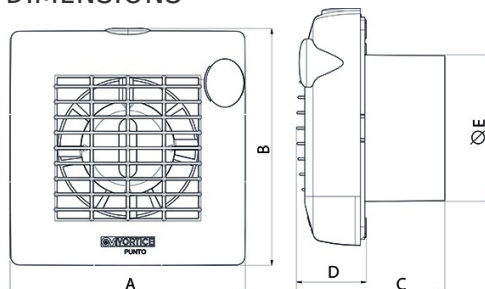

Size A (mm)	179
Size B (mm)	181
Size C (mm)	110
Size D (mm)	47
Size E (mm)	Ø 119

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11312

M 120/5" T LL


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').

CURVES

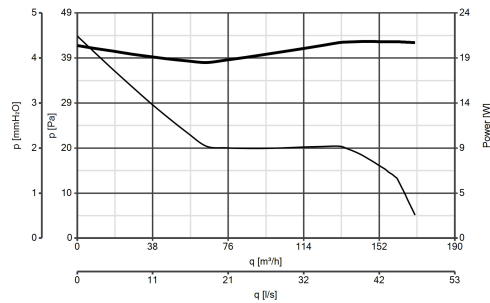

ACCESSORIES



S 120/5

Code 22155



F 120/5"

Code 22132

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com