

FANselect



fan data

11.07.2023

version FANselect V 1.01 (230711), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.23.07.11 | 28707 | (user ZAFS18707)



type	FN035-4ED.WD.A7
article no.	162547 Portfolio STD-WWW

technical data

motor		AC
mains supply	-	1~ 230V 50Hz
nominal current (I _N)	A	0.56
capacitor (C _{400V})	µF	5.0
ambient temperature, max. limit (t _r)	°C	60
ErP-conformity		< 125W
grille influence		pressure side not measured

fan data

fan speed (n) max. (n _{max})	1/min	- 1278
frequency (f _{DP}) (f _{max})	Hz	50 60
product weight (m _{pr})	kg	4.5

nominal values

1~ 230V 50Hz P1 0.13kW
 0.56A DI=0% 1070/MIN 5.0µF/400V 60°C
 1~ 230V 60Hz P1 0.16kW
 0.70A DI=0% 1080/MIN 5.0µF/400V 40°C
 IP44 EN60034-5 THCL155

PF:PF_50; Type:FN035-4ED.WD.A7; STol:+-10 %



performance curve / acoustics

11.07.2023

Version FANselect V 1.01 (230711), AMCA V 1.03 September, 2021
 RLT V 1.00 Dezember, 2021 / 1.23.07.11 | 28707 | (user ZAFS18707)


1

FN035-4ED.WD.A7


Measured in full nozzle without guard grille in air flow direction V in installation type A according to ISO5801

162547 | Portfolio STD-WW measurement density 1.16 [kg/m³]


air performance p_{sF}

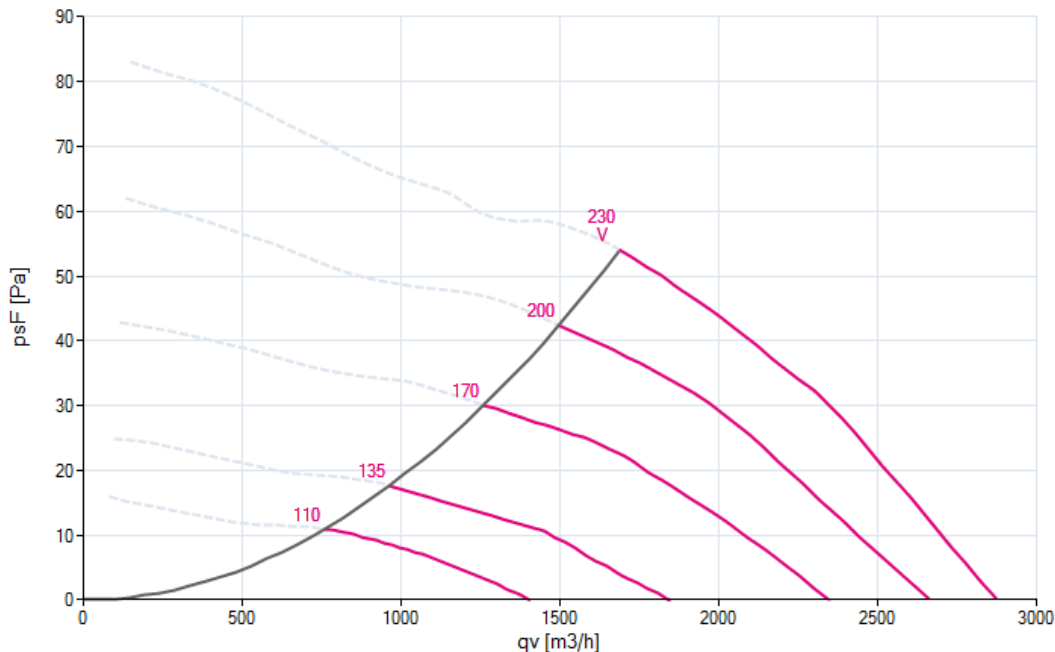

acoustics ($L_{w(A),5}$)

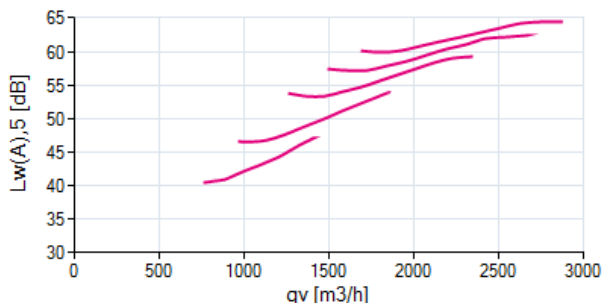

acoustics ($L_{w(A),6}$)

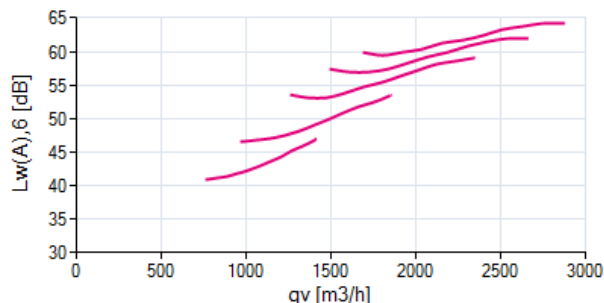

1 FN035-4ED.WD.A7

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),5}$	-	-	-	-	-	-	-	-	-
$L_{w,5}$	-	-	-	-	-	-	-	-	-

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),6}$	-	-	-	-	-	-	-	-	-
$L_{w,6}$	-	-	-	-	-	-	-	-	-